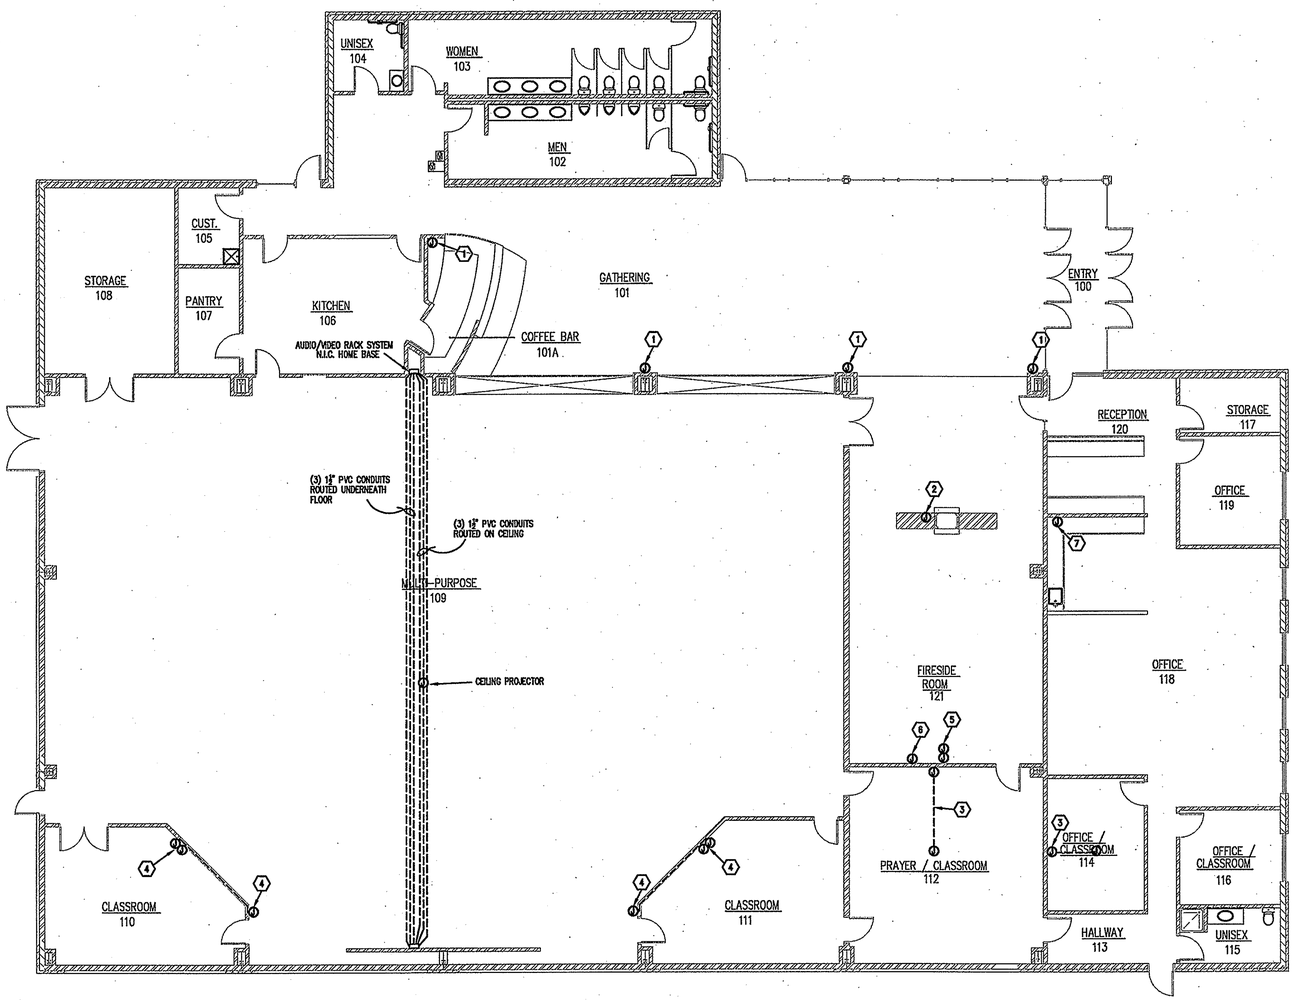


NORTH

1 / E1.1 POWER PLAN

SCALE: 1/8 = 1'-0"

## GENERAL NOTES

1. SEE SHEET E1.1 FOR MAIN POWER PLAN.
2. ALL CONDUIT FROM JUNCTION BOXES SHALL BE RUN BACK TO AUDIO/VIDEO NIC HOME BASE AREA.
3. ELECTRICAL CONTRACTOR TO WORK WITH OWNER FOR ADDITIONAL CONDUIT STUBS THAT MAY BE REQUIRED.
4. ELECTRICAL CONTRACTOR TO RUN AS MANY CONDUITS AS POSSIBLE UNDER CONCRETE TO THE HOME BASE AUDIO/VIDEO AREA.

## CONDUIT ROUTING PLAN NOTES

1. MOUNT JUNCTION BOXES FOR TV 10'-0" A.F.F. RUN ALL CONDUIT HOMERUNS TO AUDIO/VIDEO NIC HOME RUN BASE.
2. MOUNT JUNCTION BOX IN FIREPLACE 10'-0" A.F.F. MOUNT BOX ON THIS SIDE OF FIREPLACE AS SHOWN.
3. MOUNT JUNCTION BOX IN WALL 18" A.F.F. ELECTRICAL CONTRACTOR TO RUN CONDUIT UP TO CEILING JUNCTION BOX (AS SHOWN) FOR OVERHEAD PROJECTOR.
4. MOUNT ONE JUNCTION BOX AT 18" A.F.F. MOUNT THE SECOND BOX ABOVE THE FIRST BOX, HEIGHT ABOVE TOP OF PLATFORM. ELECTRICAL CONTRACTOR TO RUN CONDUIT IN THE WALL TO THE JUNCTION BOX UNDERNEATH STAGE SPACE.
5. LOWER JUNCTION BOX TO BE MOUNTED 18" A.F.F. SECOND JUNCTION BOX TO BE MOUNTED 7'-0". ELECTRICAL CONTRACTOR TO RUN A CONDUIT BETWEEN THE TWO JUNCTION BOXES.
6. ELECTRICAL CONTRACTOR TO MOUNT JUNCTION BOX AT 18" A.F.F.
7. ELECTRICAL CONTRACTOR TO MOUNT JUNCTION BOX ABOVE COUNTERTOP AT A HEIGHT OF 48" A.F.F.

NEGEN ARCHITECTS
STUDIO 22517 178th Ave. Suite 200
Cold Spring, Minnesota 56320
TELEPHONE 320.685.3304
FACSIMILE 320.685.4039

CONSULTANTS
DUFFY ENGINEERING AND ASSOCIATES, INC.
STRUCTURAL – CIVIL – SURVEYING –
MECHANICAL – ELECTRICAL
350 Highway 10 South Suite 101 St.
Cloud, MN 56304
Phone: (320) 259-6575
Fax: (320) 259-6991
Email: mail@duffyeng.com

Mount Olivet Assembly of God
14201 Cedar Avenue South
Apple Valley, MN 55124
952.432.4332

REVISION DATE

I hereby certify that this plan, specification or report was prepared by me or under my direct supervision and that I am a duly Licensed Engineer under the laws of the state of Minnesota.

R. Scott Jones

R. Scott Jones, P.E.

02/09/2007 Date

25389 License No.

# CONDUIT ROUTING PLAN

| | |
|---|---|
| PROJECT NO.: | 06752 |
| SCALE: | AS NOTED |
| DATE: | 02/09/2007 |
| DRAWN BY: | ALR |
| CHECKED BY: | RSJ |

**DESIGN DEVELOPMENT**

# E1.3

Duffy Project File: 06752